

ISOGARD INSULATION

THICKNESS [INCHES]	LTTR	SHEETS PER BUNDLE
-----------------------	------	----------------------

0.50	2.9	96
1.00	5.7	48
1.10	6.3	43
1.20	6.8	40
1.25	7.1	38
1.30	7.4	36
1.40	8.0	34
1.50	8.6	32
1.60	9.1	30
1.70	9.7	28
1.75	10.0	27
1.80	10.3	26
1.90	10.8	25
2.00	11.4	24
2.10	12.0	22
2.20	12.6	21
2.25	12.9	21
2.30	13.2	20
2.40	13.8	20
2.50	14.4	19
2.60	15.0	18
2.70	15.6	17
2.75	15.9	17
2.80	16.2	17
2.90	16.8	16
3.00	17.4	16
3.10	18.0	15
3.20	18.6	15
3.25	18.9	14
3.30	19.2	14
3.40	19.9	14
3.50	20.5	13
3.60	21.1	13
3.70	21.7	12
3.75	22.0	12
3.80	22.3	12
3.90	23.0	12
4.00	23.6	12
4.10	24.2	11
4.20	24.9	11
4.25	25.2	11
4.30	25.5	11
4.40	26.1	10
4.50	26.8	10



ISOGARD HD COVER BOARD


CLASS	LTTR	SHEETS PER BUNDLE
Class 1 (80 PSI)	2.5	46
Class 2 (120 PSI)	2.5	46

ISOGARD HD COMPOSITE

THICKNESS [INCHES]	LTTR	SHEETS PER BUNDLE
1.50	8.2	32
1.75	9.6	27
2.00	11.1	24
2.20	12.1	22
2.50	13.9	19
3.00	16.9	16
3.50	19.9	14
4.00	23.0	12
4.50	26.1	11

ISOGARD HG WITH HAILGARD PROTECTION

THICKNESS [INCHES]	LTTR	SHEETS PER BUNDLE
1.50	6.6	32
2.00	9.5	24
2.50	12.3	19
3.00	15.3	16
3.50	18.3	14
4.00	21.4	12
4.50	24.5	11

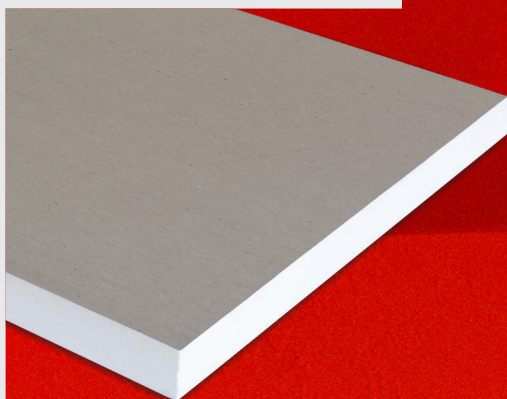

*Long-Term Thermal Resistance (LTTR-value)
means a 15-year time weighted average thermal
resistance as determined in accordance with
the LTTR test method